


Datasheet of 9068309 – IN-LINE PRESSURE INDICATOR thread-pipe 1/4-Ø6 green

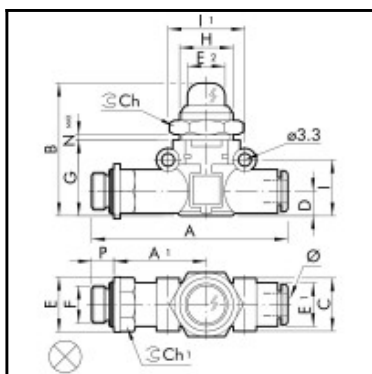

Description

Inline pressure indicator, thread-pipe, 1/4-Ø6, green, 2 – 10 bar

The LAM L pneumatic light indicator belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two FOX push-in fittings, and in the version for thread-pipe connection with a brass nickelplated male thread and a push-in fitting.

When there is no pressure, the clear technopolymer bell looks empty. When there is pressure, a red signal appears. The clear bell can be cleaned using normal detergents or ethyl alcohol, as the technopolymer used is fully compatible.

Details

Flow rate in l/min:	420 NI/min (at 6.3 bar, ?P=1 bar)
F:	1/4
B:	37
C:	14,7
Ch1:	14
E:	18
E1:	11,4
E2:	10,6
G:	21
H:	M15x1
N:	4,5
Medium suitability:	Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.
Working temperature:	-20 – +60 °C
Working pressure:	2 – 10 bar
Recommended pipe:	Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene.
Colour with pressure:	Green
Weight in kg:	0,041

Dimensions

Connection 1:	Male thread G 1/4
Connection 2:	Push-in fitting 6 mm outside calibrated
F:	1/4
Ø:	6
A:	61,5
A1:	28,8
B:	37
C:	14,7
Ch:	17
Ch1:	14
D:	6,4
E:	18
E1:	11,4
E2:	10,6
G:	21
H:	M15x1
I:	14,6
I1:	20
P:	8
N:	4,5