


## Datasheet of 9068016 – IN-LINE PRESSURE INDICATOR pipe-pipe red Ø=6

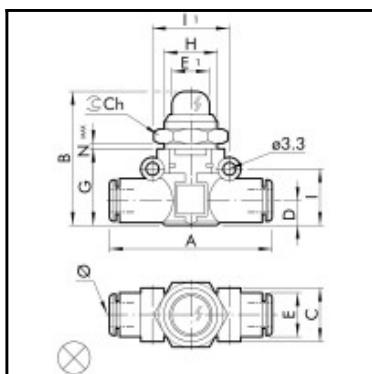

### Description

Inline pressure indicator, pipe-pipe, red, Ø=6, 2 – 10 bar

The LAM L pneumatic light indicator belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two FOX push-in fittings, and in the version for thread-pipe connection with a brass nickelplated male thread and a push-in fitting.

When there is no pressure, the clear technopolymer bell looks empty. When there is pressure, a red signal appears. The clear bell can be cleaned using normal detergents or ethyl alcohol, as the technopolymer used is fully compatible.

### Details

Flow rate in l/min:	420 NI/min (at 6.3 bar, ?P=1 bar)
B:	37
C:	14,7
E:	11,4
E1:	10,6
G:	21
H:	M15x1
N:	4,5
Medium suitability:	Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.
Working temperature:	-20 – +60 °C
Working pressure:	2 – 10 bar
Recommended pipe:	Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene.
Colour with pressure:	red
Weight in kg:	0,026

### Dimensions

Connection 1:	Push-in fitting 6 mm outside calibrated
Connection 2:	Push-in fitting 6 mm outside calibrated
Ø:	6
A:	49,4
B:	37
C:	14,7
Ch:	17
D:	6,4
E:	11,4
E1:	10,6
G:	21
H:	M15x1
I:	14,6
I1:	20
N:	4,5