


Datasheet of 9064102 – IN-LINE CHECK VALVE SERIES VNR L thread-pipe 1/8-Ø4

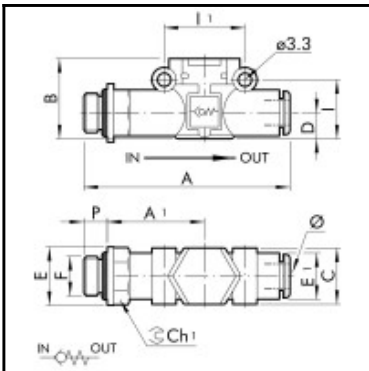

Description

Inline check valves, thread-pipe, 1/8-Ø4, 0,5 – 12 bar, 80 NI/min flow rate

The VNR L check valve belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting. It is still the only check valve with holes for wall mounting

Details

| | |
|----------------------|---|
| Flow rate in l/min: | 80 NI/min (at 6.3 bar, ?P=1 bar) |
| F: | 1/8 |
| B: | 17,5 |
| C: | 10,7 |
| Ch1: | 12 |
| E: | 14 |
| E1: | 10 |
| Medium suitability: | Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous. |
| Working temperature: | -20 – +60 °C |
| Working pressure: | 0,5 – 12 bar |
| Recommended pipe: | Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene. |
| Weight in kg: | 0,021 |

Dimensions

| | |
|---------------|---|
| Connection 1: | Male thread G 1/8 |
| Connection 2: | Push-in fitting 4 mm outside calibrated |
| F: | 1/8 |
| Ø: | 4 |
| A: | 50,6 |
| A1: | 24,6 |
| B: | 17,5 |
| C: | 10,7 |
| Ch1: | 12 |
| E: | 14 |
| E1: | 10 |
| l: | 12,8 |
| l1: | 16 |
| P: | 6 |