


## Datasheet of 9064112 – IN-LINE CHECK VALVE SERIES VNR L thread-pipe 3/8-Ø8

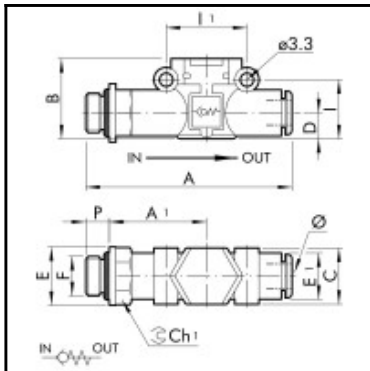

### Description

Inline check valves, thread-pipe, 3/8-Ø8, 0,5 – 12 bar, 480 NI/min flow rate

The VNR L check valve belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting. It is still the only check valve with holes for wall mounting

### Details

Flow rate in l/min:	480 NI/min (at 6.3 bar, ?P=1 bar)
F:	3/8
B:	25,5
C:	18,7
Ch1:	17
E:	22
E1:	13,8
Medium suitability:	Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.
Working temperature:	-20 – +60 °C
Working pressure:	0,5 – 12 bar
Recommended pipe:	Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene.
Weight in kg:	0,06

### Dimensions

Connection 1:	Male thread G 3/8
Connection 2:	Push-in fitting 8 mm outside calibrated
F:	3/8
Ø:	8
A:	72,2
A1:	34,8
B:	25,5
C:	18,7
Ch1:	17
E:	22
E1:	13,8
l:	18,7
l1:	24
P:	9