


## Datasheet of 9064101 – IN-LINE CHECK VALVE SERIES VNR L thread-pipe M5-Ø4

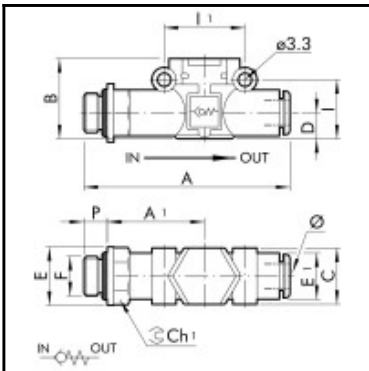

### Description

Inline check valves, thread-pipe, M5-Ø4, 0,5 – 12 bar, 80 NI/min flow rate

The VNR L check valve belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting. It is still the only check valve with holes for wall mounting

### Details

Flow rate in l/min:	80 NI/min (at 6.3 bar, ?P=1 bar)
F:	M5
B:	17,5
C:	10,7
Ch1:	9
E:	9,9
E1:	10
Medium suitability:	Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.
Working temperature:	-20 – +60 °C
Working pressure:	0,5 – 12 bar
Recommended pipe:	Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene.
Weight in kg:	0,014

### Dimensions

Connection 1:	Male thread M 5
Connection 2:	Push-in fitting 4 mm outside calibrated
F:	M5
Ø:	4
A:	47,7
A1:	22,7
B:	17,5
C:	10,7
Ch1:	9
E:	9,9
E1:	10
l:	12,8
l1:	16
P:	4