


Datasheet of 9064202 – IN-LINE CHECK VALVE SERIES VNR L pipe-thread Ø4-1/8

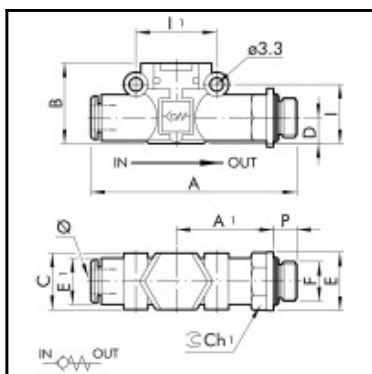

Description

Inline check valves, pipe-thread, Ø4-1/8, 0,5 – 12 bar, 80 NI/min flow rate

The VNR L check valve belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting. It is still the only check valve with holes for wall mounting

Details

Flow rate in l/min:	80 NI/min (at 6.3 bar, ?P=1 bar)
F:	1/8
B:	17,5
C:	10,7
Ch1:	12
E:	14
E1:	10
Medium suitability:	Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.
Working temperature:	-20 – +60 °C
Working pressure:	0,5 – 12 bar
Recommended pipe:	Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene.
Weight in kg:	0,021

Dimensions

Connection 1:	Push-in fitting 4 mm outside calibrated
Connection 2:	Male thread G 1/8
F:	1/8
Ø:	4
A:	50,6
A1:	24,6
B:	17,5
C:	10,7
Ch1:	12
E:	14
E1:	10
I:	12,8
I1:	16
P:	6