
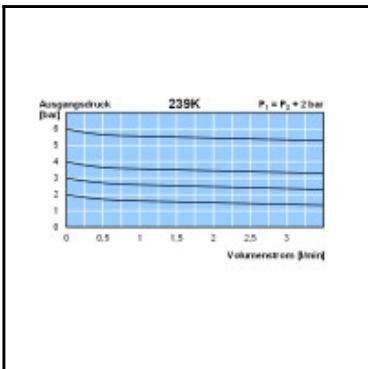


## Datasheet of 239K0210 EcoReg pressure regulator

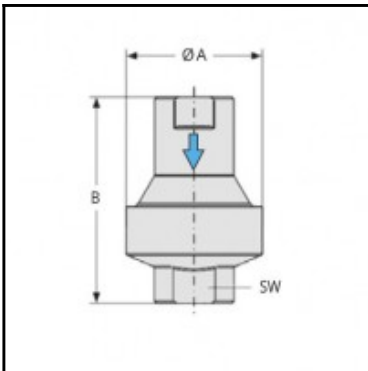

### Description

EcoReg in-line pressure regulator for drinking water, outlet pressure 1 bar, supply pressure max. 10 bar, female thread G 1/4, Grivory®

In-Line pressure regulator with factory-set outlet pressure, reducing from e.g. 10 bar to 5 bar. The outlet pressure cannot be subsequently adjusted. This safeguards against tampering.

Regulator for drinking water conforms to the FDA, EU and DIN 50930-6, TÜV drinking water directives

### Details

Series:	239K
Flow rate in l/min:	3
Series long:	239K
max. inlet pressure:	10 bar
Outlet pressure:	1 bar
Advantages:	Applications such as drinking water, food and medical industry
Working temperature:	+4°C up to +60°C
Connection:	Female thread G 1/4
Connection description:	Female thread G 1/4
Material:	Grivory®
Seal description:	Fluororubber
Surface:	blank finish
Material connection:	Grivory®
Material seal:	FPM
Case:	Grivory®
Medium suitability:	drinking water
Weight in kg:	0,125
Hydraulics:	No
Pneumatics:	No
Water-resistant:	Yes

### Dimensions

Connection A:	G 1/4
A mm:	34
B mm:	52
SW mm:	17