

## Datasheet of 232A0250 ToolReg pressure regulator



### Description


ToolReg Regulator with relieving function, outlet pressure 5 bar, supply pressure max. 25 bar, female thread G 1/4, aluminium

In-Line pressure regulator with factory-set outlet pressure, reducing from e.g. 15 bar to 6 bar. With an outlet pressure tolerance of only  $\pm 10\%$  \*2 it is especially suitable for nailing machines.

Select the pressure regulator according to the desired outlet pressure. The outlet pressure cannot be subsequently adjusted. This safeguards against tampering.

### Details

Series:	232
Flow rate in l/min:	650
Series long:	232
max. inlet pressure:	25 bar
Outlet pressure:	5 bar
Advantages:	<ul style="list-style-type: none"> <li>• Higher safety through lower pressure. Tools and equipment protected against pressure damages.</li> <li>• Cost reduction through substantially reduced air consumption. Longer service life.</li> <li>• Noise reduction for tools.</li> </ul>
Additional information:	Relieving at removal of supply pressure.
Working temperature:	0°C up to +80°C
Connection:	Female thread G 1/4
Connection description:	Female thread G 1/4
Material:	Aluminium
Seal description:	Nitrite-butadiene rubber
Surface:	blank finish
Material seal:	NBR
Medium suitability:	compressed air or non-corrosive gases
Weight in kg:	0,045
Hydraulics:	No
Pneumatics:	Yes
Water-resistant:	No

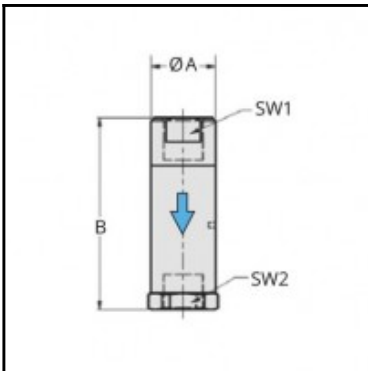

### Dimensions

Connection A:	G 1/4
A mm:	19
B mm:	59
SW mm:	16
SW1 mm:	19

