
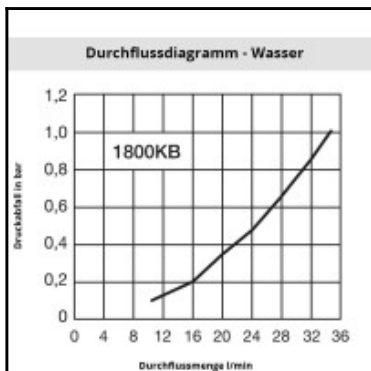


Datasheet of 1800SBIW17MPC Plug with female thread

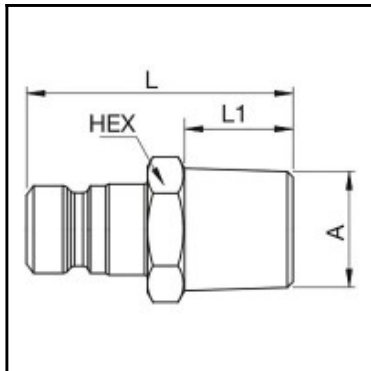

Description

Plug double shut-off, Female thread G 3/8, NW 10, <50 bar, brass chrome plated

Series 1800 is used mainly for applications in the area of compressed air and liquids. The coupling system stands out for its robust, compact design and high corrosion resistance. Ultra High Flow valve for optimum flow and low pressure drop.

Details

Series:	1800
Old order number:	18410 MN
Series long:	1800SB
Bore area in mm²:	80
Advantages:	High flow. Two-hand operation. Compact build.
Working pressure:	PB = 50 bar maximum static working pressure with safety factor 4 to 1.
Working temperature:	-20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium.
Shut-Off:	Plug Double Shut-Off
Connection:	Female thread G 3/8
Connection description:	Female thread G 3/8
Material:	brass, chrome plated
Material description:	Brass CuZn39Pb3 2.0401
Seal description:	Nitrite-butadiene rubber
Surface:	chrome plated
Material seal:	NBR
Weight in kg:	0,072
Self-venting coupling:	No
Safety locking system:	No
Single-hand operation:	No
Two-hand operation:	Yes
Ultra-FLO-valve:	Yes
Water-resistant:	No
Flat-sealing:	No
Suitable breath / respiratory protection:	No
Pressure eliminator:	No
Hydraulics:	No
Pneumatics:	Yes
Mould coupling:	No

Dimensions

L mm:	49
L1 mm:	10
SW mm:	22