


Datasheet of ES 200 ER-GA Air grinding spindle

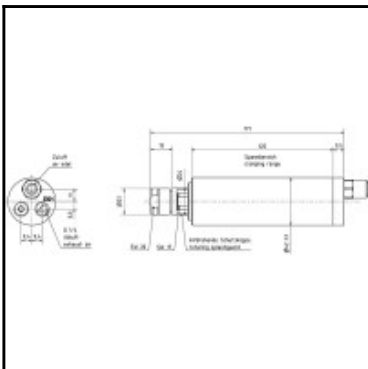

Description

20.000 min⁻¹, 400 Watt, paired bearings, guided exhaust air, ER collet

- For installation in transfer lines, machine tools and robot stations
 - Stainless steel housings
 - Stainless steel spindles
 - With collet chuck or precision collet chuck
 - High true-running accuracy
 - Paired bearings for longer tool life time and better running properties
 - Optional with rotating splashguard to prevent penetration of dust, water or chips
- All data related to 6.3 bar working pressure.

Details

Idling speed rpm:	20000
Power in kW:	0,4
Direction of rotation:	Rotating clockwise
Exhaust Air:	to rear, guided
ER collet in mm:	6
Carbide burrs up to max. diam.:	12
Mounted points up to max. diam.:	25
Noise level in dB(A):	72
Air consumption in l/s:	8,5
Anschluss Zuluftschlauch (Blitz) ø mm, innen \ außen:	10 \ 12
Item number:	60055567
Weight in kg:	1,1

Dimensions