


Datasheet of AG-12-12 Quick coupling

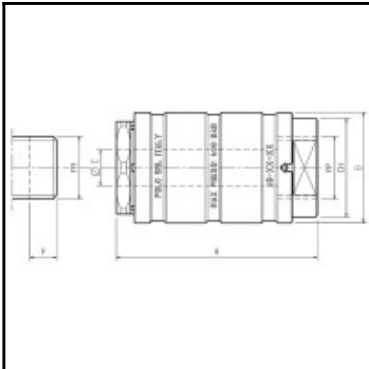

Description

Quick coupling Straight-Through for male threads and shaped elements, 1/2" G, up to 400 bar, stainless steel

- Quick connector for male threads and shaped elements
- Push-pull hand actuation
- Additional safety system against inadvertent disconnection
- Free flow
- Stainless steel
- Working pressure: from vacuum up to 400 bar (specifications for vacuum pressures on demand)

Details

Maximum working pressure in bar:	400
Shut-Off:	Quick coupling Straight-Through
Connection description:	for 1/2" male thread
Connection type:	for 1/2" male thread
Material:	Stainless steel
Weight in kg:	0,26
Self-venting coupling:	No
Safety locking system:	Yes
Two-hand operation:	No
Ball locking:	No
Pin lock:	No
Vacuum suitable:	Yes
Water-resistant:	Yes
Flat-sealing:	No
Hydraulics:	Yes
Pneumatics:	Yes
Standard product:	Yes
Mould coupling:	No

Dimensions

A mm:	67,5
B mm:	38
ØC mm:	12
CH mm:	29
FA mm:	1/2"
FP mm:	1/2"
P mm:	10,5