


## Datasheet of AGP-38-38 Quick coupling

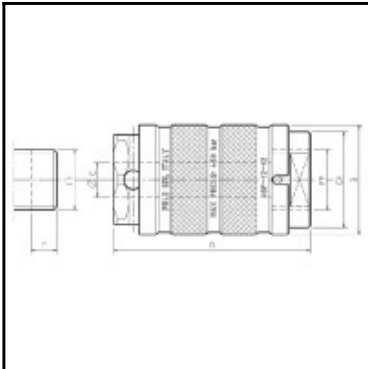

### Description

Quick coupling Straight-Through for male threads and shaped elements, 3/8" G, up to 200 bar, stainless steel

- Quick connector for male threads and shaped elements
- Push-pull hand actuation
- Additional safety system against inadvertent disconnection
- Free flow
- Stainless steel
- Working pressure: from vacuum up to 200 bar (specifications for vacuum pressures on demand)

### Details

Maximum working pressure in bar:	200
Shut-Off:	Quick coupling Straight-Through
Connection description:	for 3/8" male thread
Connection type:	for 3/8" male thread
Material:	Stainless steel
Weight in kg:	0,13
Self-venting coupling:	No
Safety locking system:	Yes
Two-hand operation:	No
Ball locking:	No
Pin lock:	No
Vacuum suitable:	Yes
Water-resistant:	Yes
Flat-sealing:	No
Hydraulics:	Yes
Pneumatics:	Yes
Standard product:	Yes
Mould coupling:	No

### Dimensions

A mm:	61
B mm:	30
ØC mm:	8,5
CH mm:	24
FA mm:	3/8"
FP mm:	3/8"
P mm:	9