


## Datasheet of Filter Regulator/Lubricator (2-part) Parker - P31CA12GEBNTLNW

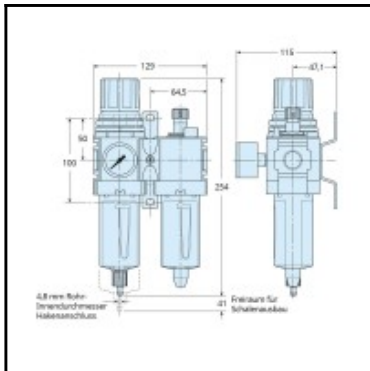

### Description

Two-part service unit, connection G 1/4", flow rate 840 l/min., degree of filtration 5 µm, maximum inlet pressure 10 bar, automatic emptying

Compact two-part maintenance unit.

Automatic emptying.

Including pressure gauge.

Stable but lightweight aluminum construction.

High efficiency filter.

Highest accuracy and response for the regulator.

Fog lubricator with combination switch and sight dome for exact adjustment of the oil quantity.

Including wall mounts.

### Details

Connection:	Female thread G 1/4"
max. inlet pressure:	10
Type of oiling:	Oil mist
Filterfeinheit in µm:	5
Flow rate in l/min:	840
Strainer:	Sintered bronze
Container:	Polycarbonate with metal protective cage made of nylon
Seals:	Nitril
Adjustment spring:	Steel
Adjustment knob:	Acetal
Element holder:	Acetal
Filter element:	Polyethylen
Casing cover:	ABS
Case:	Aluminium
Transparent container:	Polycarbonat
Membrane:	Brass/Nitrile
Control panel nut:	Acetal
Weight in kg:	0,58

### Dimensions