


## Datasheet of Filter Parker - P32FB12EGAN

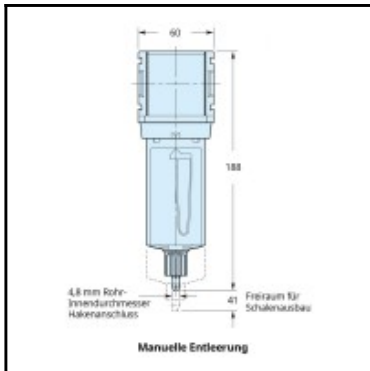

### Description

Filter, connection G 1/4", flow rate 1440 l/min., degree of filtration 5 µm, maximum inlet pressure 10 bar, automatic emptying

Compact particulate filter.  
Automatic emptying.  
High efficiency particulate.  
Stable but lightweight aluminum construction.  
Positive bayonet lock to ensure the correct and secure connection.  
Container protection with view slots.

### Details

Connection:	Female thread G 1/4"
max. inlet pressure:	10
Filterfeinheit in µm:	5
Flow rate in l/min:	1440
Deflection plate:	Polypropylen
Container:	Polycarbonate with metal protective cage made of nylon
Seals:	Nitril
Element holder:	Acetal
Filter element:	Sintered polyethylene
Casing cover:	ABS
Case:	Aluminium
Transparent container:	Polycarbonat
Weight in kg:	0,28

### Dimensions