


Datasheet of Filter Parker - P32FB13ESAN

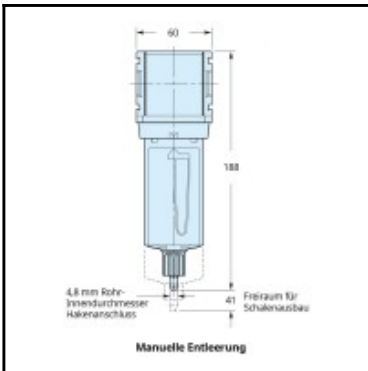

Description

Filter, connection G 3/8", flow rate 2220 l/min., degree of filtration 5 µm, maximum inlet pressure 17 bar, automatic emptying, metal container

Compact particulate filter.
Automatic emptying.
High efficiency particulate.
Stable but lightweight aluminum construction.
Positive bayonet lock to ensure the correct and secure connection.
Metal container with sight glass.

Details

Connection:	Female thread G 3/8"
max. inlet pressure:	17
Filterfeinheit in µm:	5
Flow rate in l/min:	2220
Deflection plate:	Polypropylen
Container:	Aluminum with sight glass
Seals:	Nitril
Element holder:	Acetal
Filter element:	Sintered polyethylene
Casing cover:	ABS
Case:	Aluminium
Transparent container:	Polycarbonat
Weight in kg:	0,28

Dimensions