


## Datasheet of Regulator Parker - P32RB13BNGP

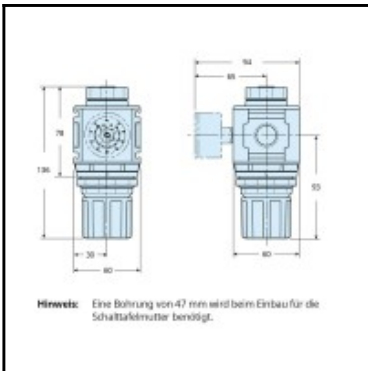

### Description

Regulator, connection G 3/8", flow rate 4680 l/min., maximum inlet pressure 20 bar

Compact regulator

Highest accuracy and response through standard secondary ventilation and primary pressure compensation.

Flushing knob.

With emptying.

Including pressure gauge.

### Details

Connection:	Female thread G 3/8"
max. inlet pressure:	20
Flow rate in l/min:	4680
Seals:	Nitril
Adjustment spring:	Steel
Adjustment knob:	Acetal
Case:	Aluminium
Membrane:	Nitril/Zinc
Control panel nut:	Acetal
Valve neck:	Nylon with 33% glass filling
Weight in kg:	0,453

### Dimensions