


Datasheet of Lubricator Parker - P32LB12LSNN

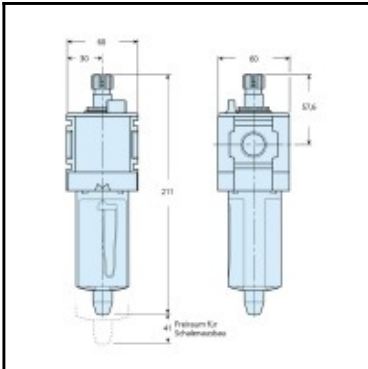

Description

Lubricator, connection G 1/4", flow rate 1020 l/min., maximum inlet pressure 17 bar, fog lubrication, metal container

Compact fog lubricator.
Stable but lightweight aluminum construction.
Proportional lubrication over a wide air flow range.
Easy adjustment with ratchet for the exact oil delivery.
Easy oil filling from above - even under pressure.
Metal container with sight glass.

Details

Connection:	Female thread G 1/4"
max. inlet pressure:	17
Type of oiling:	Oil mist
Flow rate in l/min:	1020
Strainer:	Sintered bronze
Container:	Aluminium
Seals:	Nitril
Casing cover:	ABS
Case:	Aluminium
Transparent container:	Polycarbonat
Weight in kg:	0,31

Dimensions