


## Datasheet of Lubricator Parker - P32LB14LGNN

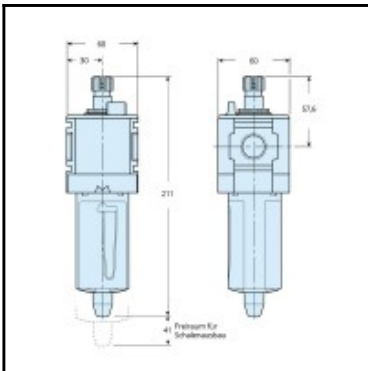

### Description

Lubricator, connection G 1/2", flow rate 2520 l/min., maximum inlet pressure 10 bar, fog lubrication

Compact fog lubricator.  
Stable but lightweight aluminum construction.  
Proportional lubrication over a wide air flow range.  
Easy adjustment with ratchet for the exact oil delivery.  
Easy oil filling from above - even under pressure.

### Details

Connection:	Female thread G 1/2"
max. inlet pressure:	10
Type of oiling:	Oil mist
Flow rate in l/min:	2520
Strainer:	Sintered bronze
Container:	Polycarbonat
Seals:	Nitril
Casing cover:	ABS
Case:	Aluminium
Transparent container:	Polycarbonat
Weight in kg:	0,31

### Dimensions