


Datasheet of Filter regulator/lubricator (two-part) BIT - 5206011

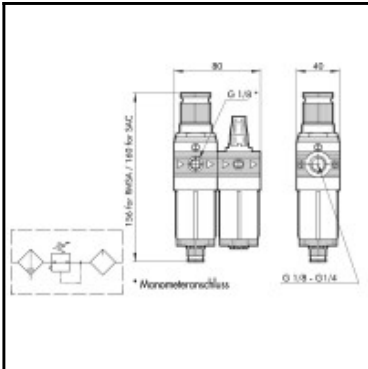

Description

Two-part service unit BIT, connection female thread G 1/4", flow rate 260 l/min., degree of filtration 20 µm, maximum inlet pressure 13 bar

- Compact FR+L unit with rolling diaphragm.
- High flow rates with reduced pressure drop.
 - Excellent degree of condensate separation.
 - Quantity of lubricant proportioned to air flow.
 - Activates at low flow rates

Details

Series:	Bit
Connection:	Female thread G 1/4"
max. inlet pressure:	13
Working pressure:	0-12 bar
Mounting position:	Vertical
Installation:	M4 by means of the bracket provided
Type of oiling:	Drip lubricator
Filterfeinheit in µm:	20
Flow rate in l/min:	260
Weight in kg:	0,17

Dimensions