


Datasheet of Regulator MR BIT - 5107004

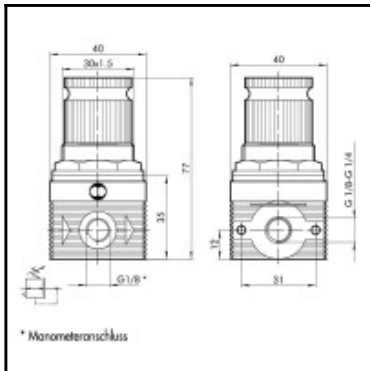

Description

Regulator BIT, connection female thread G 1/8", flow rate 600 l/min., maximum inlet pressure 13 bar

Micro-regulator with rolling diaphragm.

- Preset pressure stability as the upstream pressure varies.
- High flow rates with reduced pressure drops.
- Quick overpressure exhaust.
- Including pressure gauge.

Details

Series:	Bit
Connection:	Female thread G 1/8"
max. inlet pressure:	13
Working pressure:	0-12 bar
Mounting position:	In any position
Installation:	M4 by means of the bracket provided
Flow rate in l/min:	600
Seals:	NBR
Dome:	Technopolymer
Adjustment spring:	Steel
Adjustment knob:	Technopolymer
Adjusting screw:	Brass Ms58
Body:	Technopolymer with threaded sleeve brass Ms58
Regulator screw:	Brass Ms58
Ring nut:	Technopolymer
Plug:	Technopolymer
Valve spring:	Stainless steel
Valve part:	Ms58 vulcanized with NBR
Weight in kg:	0,08

Dimensions