


Datasheet of Filter regulator BIT - 5105011

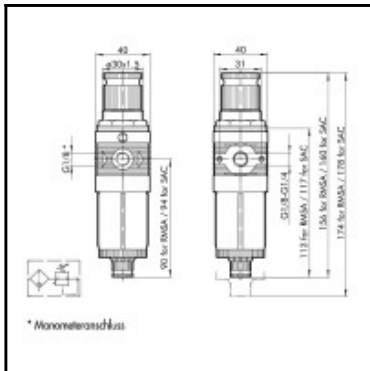

Description

Filter regulator BIT, connection female thread G 1/8", flow rate 600 l/min., degree of filtration 20 µm, maximum inlet pressure 13 bar

Filter regulator with rolling diaphragm.

- High flow rate with reduced pressure drop
- Excellent degree of condensate separation
- Semi-automatic or automatic drain
- All-round condensate level viewing
- Including pressure gauge.

Details

Series:	Bit
Connection:	Female thread G 1/8"
max. inlet pressure:	13
Working pressure:	0-12 bar
Mounting position:	Vertical
Installation:	M4 by means of the bracket provided
Filterfeinheit in µm:	20
Flow rate in l/min:	600
Shielding:	Technopolymer
Container:	Transparent technopolymer
Seals:	NBR
Dome:	Technopolymer
Adjustment spring:	Steel
Filter element:	HDPE
Adjusting screw:	Brass Ms58
Body:	Technopolymer with threaded sleeve brass Ms58
Nut:	Brass Ms58
Ring nut:	Technopolymer
Valve spring:	Stainless steel
Valve part:	Ms58 vulcanized with NBR
Centrifuge:	Technopolymer
Weight in kg:	0,11

Dimensions