


## Datasheet of Lubricator BIT - 5103001

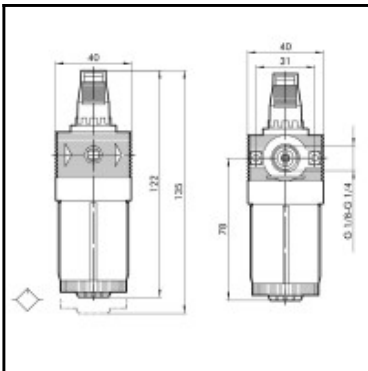

### Description

Drip lubricator BIT, connection female thread G 1/8", flow rate 710 l/min., maximum inlet pressure 13 bar

- Mini-lubricator with high lubrication stability.
- Quantity of lubricant proportioned to air flow.
  - Activates at low flow rates.
  - Micrometric regulation of lubricant flow.
  - All-round oil level viewing.

### Details

Series:	Bit
Connection:	Female thread G 1/8"
max. inlet pressure:	13
Mounting position:	Vertical
Installation:	M4 by means of the bracket provided
Type of oiling:	Drip lubricator
Flow rate in l/min:	710
Transparent container:	Transparent technopolymer
Body:	Technopolymer with threaded sleeve brass Ms58
Oiler dome:	Transparent technopolymer
Control needle:	Brass Ms58
Hose:	Rilsan®
Plug:	Technopolymer
Venturi system:	NBR
Weight in kg:	0,04

### Dimensions