


Datasheet of WPN 25 TAB WaterProfi-coupling SLW 25 Quick coupling

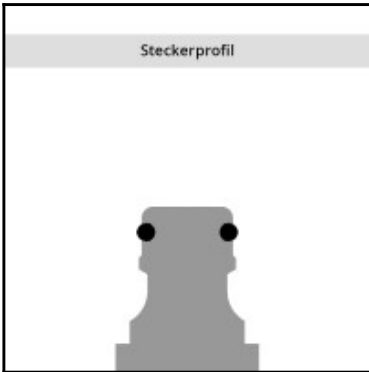

Description

WaterProfi-quick coupling with shut-off valve and hose connection 1" (25 mm), brass nickel plated, DN 9

WaterProfi quick couplings are completely made of brass MS 58 which offers a more robust and wear resistance vs other couplings made of plastics. The one-hand operation guarantees a simplified work and an optimum ease of use. WaterProfi products are outfitted with O-rings to offer best sealing characteristics. That means: leakages can be avoided with the coupling system as often seen with pre-mounted compression fittings now in the past.

Details

| | |
|----------------------------------|--------------------------------|
| Series: | WPN |
| Old order number: | WS 25 TAB |
| Series long: | WPN |
| Bore: | DN 9 |
| Maximum working pressure in bar: | PN 16 bar |
| max. temperature in °C: | +95°C |
| Shut-Off: | Quick coupling Single Shut-Off |
| Connection: | Hose barb 25mm LW(1") |
| Material: | Brass nickel plated |
| Weight in kg: | 0,135 |
| Water-resistant: | Yes |
| Single-hand operation: | Yes |
| Two-hand operation: | No |
| Self-venting coupling: | No |
| Safety locking system: | No |
| Flat-sealing: | No |

Dimensions

| | |
|--------|------|
| L mm: | 64 |
| D mm: | 28 |
| L1 mm: | 22,5 |