


## Datasheet of 0172 05 13 Quick coupling with female thread

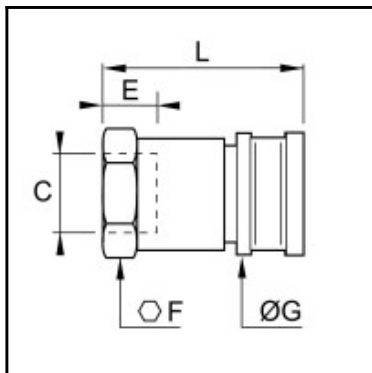

### Description

Quick coupling single shut-off, female thread G 1/4, nominal diameter 5, <20 bar, brass nickel plated, seal NBR

The standard range offers a robust construction and a good compromise between size and flow performance.

- Robust construction - perfect solution for demanding applications
- Nickel-plated brass for corrosion resistance

### Details

|                                  |                                |
|----------------------------------|--------------------------------|
| Series:                          | Standard                       |
| C:                               | G 1/4"                         |
| E:                               | 11                             |
| F:                               | 19                             |
| G:                               | 21                             |
| L:                               | 47                             |
| Flow rate in l/min:              | 480 (air)                      |
| Material connection:             | Brass nickel plated            |
| Series long:                     | Standard                       |
| Working temperature:             | -20°C to +80°C (NBR)           |
| Surface:                         | nickel plated                  |
| Shut-Off:                        | Quick coupling Single Shut-Off |
| Connection:                      | Female thread G 1/4            |
| Material sleeve:                 | Brass nickel plated            |
| Connection description:          | BSPP                           |
| Connection type:                 | Female thread                  |
| Bore in mm:                      | 5                              |
| Maximum working pressure in bar: | 20                             |
| Material seal:                   | NBR                            |
| Material:                        | Brass nickel plated            |
| RoHS compliant:                  | Yes                            |
| Weight in kg:                    | 0,088                          |

### Dimensions

|                    |        |
|--------------------|--------|
| Size connection 1: | G1/4   |
| C:                 | G 1/4" |
| E:                 | 11     |
| F:                 | 19     |
| G:                 | 21     |
| L:                 | 47     |