


Datasheet of 0187 05 10 Plug with male thread

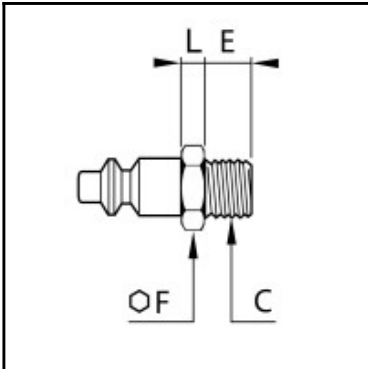

Description

Plug straight-through, male thread G 1/8, nominal diameter 5, <20 bar, galvanized steel

The standard range offers a robust construction and a good compromise between size and flow performance.

- Robust construction - perfect solution for demanding applications
- Nickel-plated brass for corrosion resistance

Details

Series:	Standard
C:	G 1/8"
E:	7
F:	14
L:	4
Flow rate in l/min:	480 (air)
Material connection:	Galvanized steel
Series long:	Standard
Working temperature:	-20°C to +80°C (NBR)
Surface:	zinc plated
Shut-Off:	Plug Straight-Through
Connection:	Male thread G 1/8
Material sleeve:	Galvanized steel
Connection description:	BSPP
Connection type:	Male thread
Bore in mm:	5
Maximum working pressure in bar:	20
Material:	Galvanized steel
RoHS compliant:	Yes
Weight in kg:	0,0192

Dimensions

Size connection 1:	G1/8
C:	G 1/8"
E:	7
F:	14
L:	4