


Datasheet of 0189 05 00 Double plug

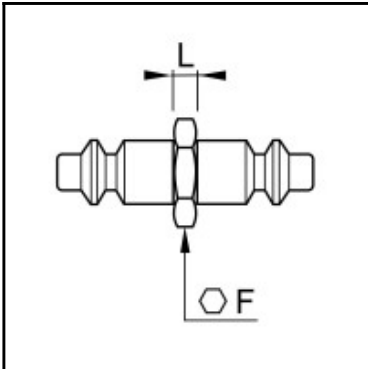

Description

Plug straight-through, double plug, nominal diameter 5, <20 bar, galvanized steel

The standard range offers a robust construction and a good compromise between size and flow performance.

- Robust construction - perfect solution for demanding applications
- Nickel-plated brass for corrosion resistance

Details

Series:	Standard
F:	12
L:	4
Flow rate in l/min:	480 (air)
Material connection:	Galvanized steel
Series long:	Standard
Working temperature:	-20°C to +80°C (NBR)
Surface:	zinc plated
Shut-Off:	Plug Straight-Through
Connection:	Double plug
Material sleeve:	Galvanized steel
Connection type:	Other connections
Bore in mm:	5
Maximum working pressure in bar:	20
Material:	Galvanized steel
RoHS compliant:	Yes
Weight in kg:	0,025

Dimensions

F:	12
L:	4