
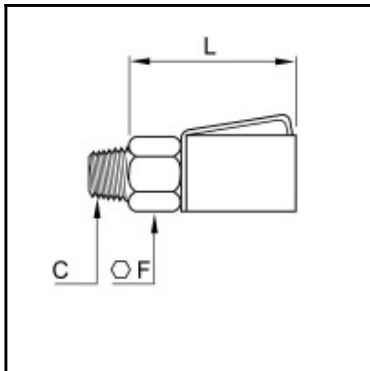


## Datasheet of 0171 02 55 01 Quick coupling with male thread

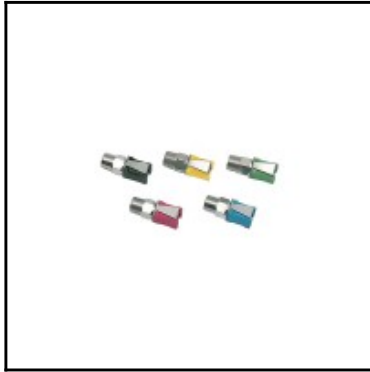

### Description

Quick coupling single shut-off, male thread M 7, nominal diameter 2, <20 bar, engineered polymer, seal NBR

The one-way shut-off mini series offers a space-saving solution for frequent connection and disconnection of hoses and pneumatic connections.

- Compact construction and ergonomic design
- Color coding: recognizing the circuits at a glance
- Easy uncoupling / one-handed operation

### Details

Series:	Mini
C:	M7x1
E:	6
F:	10
L:	21
Flow rate in l/min:	165 (air)
Material connection:	Brass nickel plated
Series long:	Mini
Working temperature:	-20°C to +60°C (NBR)
Surface:	nickel plated
Shut-Off:	Quick coupling Single Shut-Off
Connection:	Male thread M 7
Material sleeve:	Plastic
Connection description:	Metric
Connection type:	Male thread
Bore in mm:	2
Maximum working pressure in bar:	20
Material seal:	NBR
Material:	Engineered polymer
RoHS compliant:	Yes
Weight in kg:	0,01

### Dimensions

Size connection 1:	M7x1
C:	M7x1
E:	6
F:	10
L:	21