


## Datasheet of 0181 03 04 Plug with hose barb

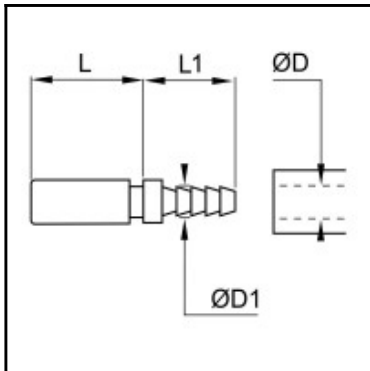

### Description

Plug straight-through, hose barb 3mm, nominal diameter 2, <20 bar, brass nickel plated

The one-way shut-off mini series offers a space-saving solution for frequent connection and disconnection of hoses and pneumatic connections.

- Compact construction and ergonomic design
- Color coding: recognizing the circuits at a glance
- Easy uncoupling / one-handed operation

### Details

Series:	Mini
ØD:	3
ØD1:	3,3
L:	11,5
L1:	13,5
Flow rate in l/min:	165 (air)
Material connection:	Brass nickel plated
Series long:	Mini
Working temperature:	-20°C to +60°C (NBR)
Surface:	nickel plated
Shut-Off:	Plug Straight-Through
Connection:	Hose barb 3 mm
Connection description:	Hose barb for polyamid hose (PA)
Connection type:	Hose barb
Connection tube outside diameter 2:	3
Connection tube outside diameter 3:	3,3
Bore in mm:	2
Maximum working pressure in bar:	20
Material:	Brass nickel plated
RoHS compliant:	Yes
Weight in kg:	0,01

### Dimensions

ØD:	3
ØD1:	3,3
L:	11,5
L1:	13,5