


Datasheet of 0183 02 10 Plug with male thread

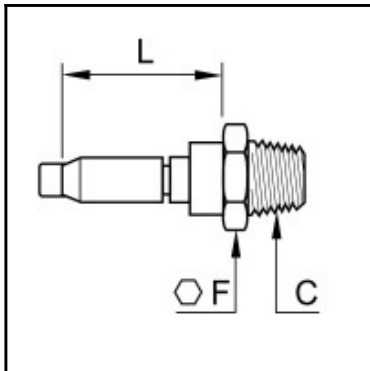

Description

Plug double shut-off, male thread R 1/8, nominal diameter 2, <20 bar, brass nickel plated, seal NBR

The one-way shut-off mini series offers a space-saving solution for frequent connection and disconnection of hoses and pneumatic connections.

- Compact construction and ergonomic design
- Color coding: recognizing the circuits at a glance
- Easy uncoupling / one-handed operation

Details

Series:	Mini
C:	R 1/8"
F:	10
L:	13
Flow rate in l/min:	165 (air)
Material connection:	Brass nickel plated
Series long:	Mini
Working temperature:	-20°C to +60°C (NBR)
Surface:	nickel plated
Shut-Off:	Plug Double Shut-Off
Connection:	Male thread R 1/8
Connection description:	BSPT
Connection type:	Male thread
Bore in mm:	2
Maximum working pressure in bar:	20
Material seal:	NBR
Material:	Brass nickel plated
RoHS compliant:	Yes
Weight in kg:	0,007

Dimensions

Size connection 1:	R1/8
C:	R 1/8"
F:	10
L:	13