


Datasheet of 3150 00 61 Plug with hose barb

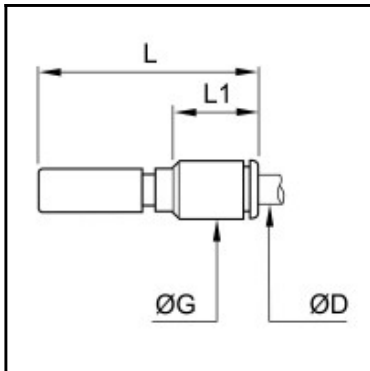

Description

Plug straight-through, push-in fitting 4 mm, nominal diameter 3, <20 bar, brass nickel plated, seal NBR

The one-way shut-off mini series offers a space-saving solution for frequent connection and disconnection of hoses and pneumatic connections.

- Compact construction and ergonomic design
- Color coding: recognizing the circuits at a glance
- Easy uncoupling / one-handed operation

Details

Series:	Mini
ØD:	4
G:	8,5
L:	39
L1:	18
Flow rate in l/min:	165 (air)
Material connection:	Brass nickel plated
Material fastening ring:	Stainless steel
Series long:	Mini
Working temperature:	-20°C to +60°C (NBR)
Surface:	nickel plated
Shut-Off:	Plug Straight-Through
Connection:	Push-in fitting 4 mm outside calibrated
Connection description:	Push-in connection LF3000
Connection type:	Hose barb
Connection tube outside diameter 2:	4
Bore in mm:	3
Maximum working pressure in bar:	20
Material seal:	NBR
Material:	Brass nickel plated
RoHS compliant:	Yes
Weight in kg:	0,008

Dimensions

ØD:	4
G:	8,5
L:	39
L1:	18