


Datasheet of 2270 21 00 Ball valve with quick coupling

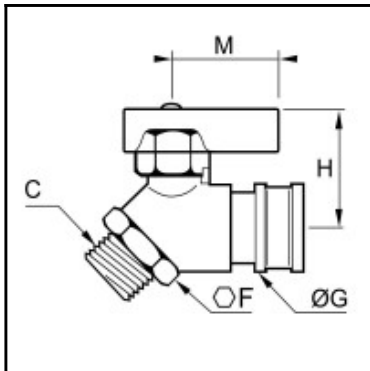

Description

Ball valve brass, Quick coupling straight-through, male thread G 1/2, nominal diameter 12, <20 bar, brass nickel plated, seal NBR

The Medium series is particularly suitable for water and compressed air applications. The wide range of connectors allows many combination options for the end user.

- Designed to transport water and liquids
- High flow capability
- Maximum energy efficiency

Details

| | |
|----------------------------------|---------------------------------|
| Series: | Medium |
| C: | G 1/2" |
| F: | 28 |
| G: | 29 |
| H: | 40,5 |
| Flow rate in l/min: | 2.200 (air) |
| Material connection: | Brass nickel plated |
| Series long: | Medium |
| Working temperature: | -20°C up to +100°C (NBR) |
| Surface: | nickel plated |
| Shut-Off: | Quick coupling Straight-Through |
| Connection: | Male thread G 1/2 |
| Connection description: | Male thread BSPP |
| Connection type: | Male thread |
| Bore in mm: | 12 |
| Maximum working pressure in bar: | 20 |
| Material seal: | NBR |
| Material: | Brass nickel plated |
| RoHS compliant: | Yes |
| Weight in kg: | 0,271 |

Dimensions

| | |
|--------------------|--------|
| Size connection 1: | G1/2 |
| C: | G 1/2" |
| F: | 28 |
| G: | 29 |
| H: | 40,5 |