


Datasheet of 2294 12 17 Plug with male thread

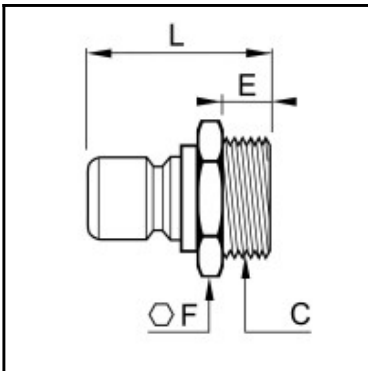

Description

Plug straight-through, male thread G 3/8, nominal diameter 12, <20 bar, brass nickel plated

The Medium series is particularly suitable for water and compressed air applications. The wide range of connectors allows many combination options for the end user.

- Designed to transport water and liquids
- High flow capability
- Maximum energy efficiency

Details

Series:	Medium
C:	G 3/8"
E:	6
F:	22
L:	31,5
Flow rate in l/min:	2.200 (air)
Material connection:	Brass nickel plated
Series long:	Medium
Working temperature:	-20°C up to +100°C (NBR)
Surface:	nickel plated
Shut-Off:	Plug Straight-Through
Connection:	Male thread G 3/8
Connection description:	Male thread BSPP
Connection type:	Male thread
Bore in mm:	12
Maximum working pressure in bar:	20
Material:	Brass nickel plated
RoHS compliant:	Yes
Weight in kg:	0,0325

Dimensions

Size connection 1:	G3/8
C:	G 3/8"
E:	6
F:	22
L:	31,5