


## Datasheet of 2297 12 12 Quick coupling with hose barb

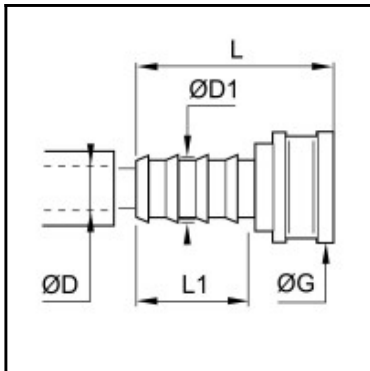

### Description

Quick coupling straight-through, hose barb 12mm, nominal diameter 12, <20 bar, brass nickel plated, seal NBR

The Medium series is particularly suitable for water and compressed air applications. The wide range of connectors allows many combination options for the end user.

- Designed to transport water and liquids
- High flow capability
- Maximum energy efficiency

### Details

Series:	Medium
ØD:	12
ØD1:	13,5
G:	29
L:	51
L1:	27
Flow rate in l/min:	2.200 (air)
Material connection:	Brass nickel plated
Series long:	Medium
Working temperature:	-20°C up to +100°C (NBR)
Surface:	nickel plated
Shut-Off:	Quick coupling Straight-Through
Connection:	Hose barb 12mm
Connection description:	Plug
Connection type:	Hose barb
Connection tube outside diameter 2:	12
Connection tube outside diameter 3:	13,5
Bore in mm:	12
Maximum working pressure in bar:	20
Material seal:	NBR
Material:	Brass nickel plated
RoHS compliant:	Yes
Weight in kg:	0,076

### Dimensions

ØD:	12
ØD1:	13,5
G:	29
L:	51
L1:	27