
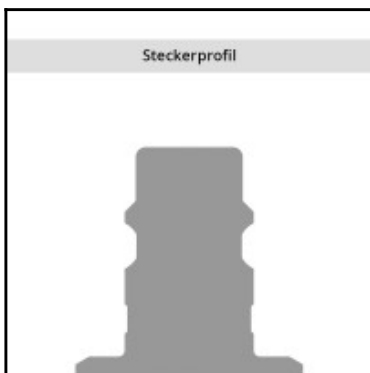
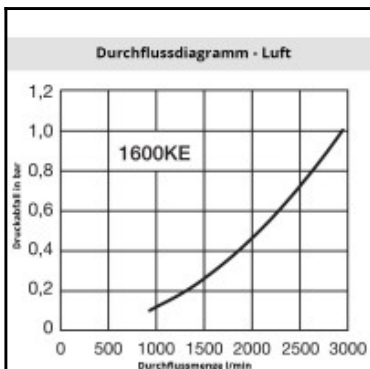


Datasheet of 1600KEIW17SPN Quick coupling self-venting

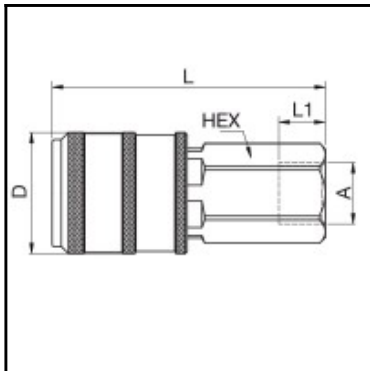

Description

Safety coupling with a self-venting system, female thread G 3/8, nominal diameter 7,8, <12 bar, steel nickel plated, seal NBR

Safety coupling with a self-venting system. Selfventing takes place during disconnection – no risk of pressurised hoses being tossed around. When the sleeve is pulled back, the plug is released yet remains locked in. The coupling valve closes and the air is vented from the air line at the same time. Only then, by operating the sleeve again, can uncoupling takeplace safely. The system fulfils the requirements of ISO 4414 – increased safety standards in the workplace. DIN EN 983. UltraFlo valve for optimum flow and low pressure drop.

Details

| | |
|---|---|
| Series: | 1600 |
| Series long: | 1600KE |
| Bore in mm: | 7,8 |
| Bore area in mm²: | 48 |
| Advantages: | No risk of pressurised hoses being tossed around. |
| Additional information: | Reliable functioning can only be guaranteed in conjunction with original Parker Rectus plugs made of steel. |
| Working pressure: | 2-12 bar maximum static working pressure with safety factor 4 to 1. |
| Working temperature: | -20°C up to +100°C (NBR) depending on the medium. |
| Shut-Off: | Quick coupling Self-Venting system |
| Connection: | Female thread 3/8" |
| Connection description: | Female pipe thread of Whitworth form ISO 228 3/8" |
| Connection type: | Female thread |
| Material: | Steel nickel-plated |
| Material description: | Steel 9SMnPb28K 1.0718 |
| Seal description: | Nitrite-butadiene rubber |
| Surface: | nickel plated |
| Material connection: | Brass nickel plated |
| Material valve body: | steel zinc plated, thick film passivated |
| Material sleeve: | steel hardened |
| Material valve: | Brass |
| Material spring snap ring: | stainless steel AISI 301 |
| Material balls/pins: | Stainless steel AISI 420 |
| Material seal: | Perbunan® |
| Weight in kg: | 0,001 |
| Self-venting coupling: | Yes |
| Safety locking system: | Yes |
| Single-hand operation: | Yes |
| Two-hand operation: | No |
| Ball locking: | Yes |
| Pin lock: | No |
| Ultra-FLO-valve: | Yes |
| Vacuum suitable: | Yes |
| Water-resistant: | No |
| Flat-sealing: | No |
| Suitable breath / respiratory protection: | No |
| Pressure eliminator: | No |
| Hydraulics: | No |
| Pneumatics: | Yes |
| Standard product: | No |
| Mould coupling: | No |

Dimensions

| | |
|---------------|-------|
| Connection A: | G 3/8 |
| D mm: | 26 |
| L mm: | 59 |
| L1 mm: | 9 |
| SW mm: | 19 |