


## Datasheet of WSS08/025/01 PU-hose

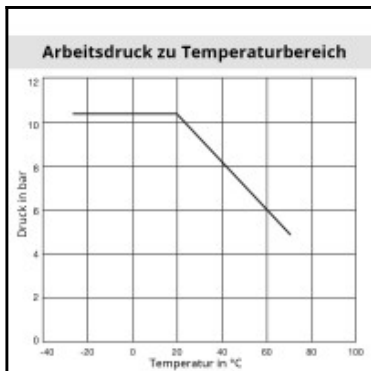

### Description

PU-hose black, RECTUSPARK, 5,0 x 8,0 mm, length 25 m

The blue ether based 95 durometer polyurethane inner tubing is offered in two metric sizes. It is covered with a specially formulated black flame retardant cover which has excellent tear and tensile strength, yet is resistant to oils, greases, acids, bases, aqueous solutions, ozone, UV light and heat aging. This cover has strong insulative properties and meets UL-94-VO specifications.

### Details

Series:	RECTUSPARK
Colour:	black
Material:	Polyurethane (PU)
Working temperature:	-25°C up to +70°C
Working pressure:	see chart
Additional information:	Protection against welding sparks
Advantages:	<p>Black flame retardant cover protects tubing from incidental contact with welding sparks. The cover does not adhere to the inner tube, allowing the jacket to be easily skived back for connection with conventional compression or push-in fittings.</p> <ul style="list-style-type: none"> <li>- Extremely flexible with excellent bend radius capability</li> <li>- Very resistant to kink damage</li> <li>- Broad range of chemical resistance</li> <li>- Good aging resistance for long service life</li> </ul>
Weight in kg:	1,62

### Dimensions

Inner diameter:	5,0 mm
Connection 1:	without
Connection 2:	without
Length in m:	25
Hose Inner diameter in mm:	5,0
Outer diameter in mm:	8,0
Wall thickness in mm:	1,5