


## Datasheet of 21SFTF08MXX3 Plug color coded

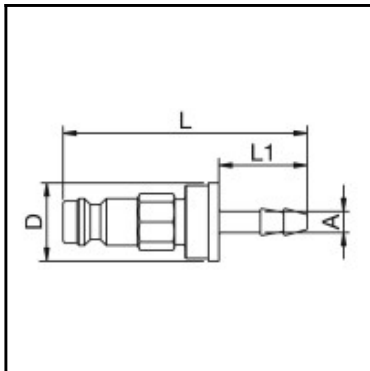

### Description

Plug straight-through, coded system (3 = brown, triangle), hose barb 8mm (5/16), nominal diameter 5, <35 bar, brass

Coded industrial coupling system developed on the basis of series 21 with above-average flow rate for liquid and gaseous media. Coupling system with single-hand operation. The mechanical coding of the coupling and plug offers a guarantee for avoiding mix-ups between media when coupling, which is complemented by the color coding of the anodised sleeves. Double shut-off version available on request.

### Details

|   |   |
|---|---|
| Series:                                   | 21  |
| Series long:                              | 21SF  |
| Bore in mm:                               | 5   |
| Bore area in mm²:                         | 20  |
| Advantages:                               | Quality product. One-hand operation.                              |
| Working pressure:                         | 35 bar maximum static working pressure with safety factor 4 to 1. |
| Working temperature:                      | -20°C up to +100°C (NBR)  |
| Shut-Off:                                 | Plug Straight-Through   |
| Connection:                               | Hose barb 8mm LW(5/16")   |
| Connection description:                   | Hose barb 8mm LW(5/16")   |
| Connection type:                          | Hose barb   |
| Material:                                 | Brass   |
| Material description:                     | Brass CuZn39Pb3 2.0401 (except sleeve)                            |
| Surface:                                  | blank finish  |
| Coding:                                   | 3 = brown, triangle   |
| Weight in kg:                             | 0,022   |
| Coded:                                    | Yes   |
| Self-venting coupling:                    | No  |
| Safety locking system:                    | No  |
| Single-hand operation:                    | Yes   |
| Two-hand operation:                       | No  |
| Ball locking:                             | No  |
| Pin lock:                                 | No  |
| Ultra-FLO-valve:                          | No  |
| Vacuum suitable:                          | Yes   |
| Water-resistant:                          | Yes   |
| Flat-sealing:                             | No  |
| Suitable breath / respiratory protection: | No  |
| Pressure eliminator:                      | No  |
| Hydraulics:                               | No  |
| Pneumatics:                               | Yes   |
| Standard product:                         | No  |
| Mould coupling:                           | No  |

### Dimensions