
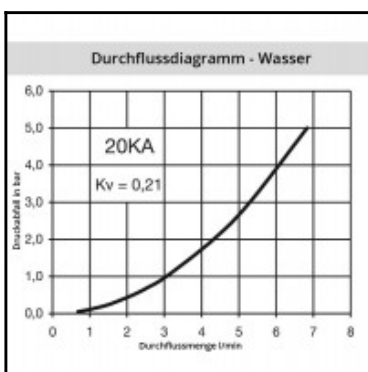
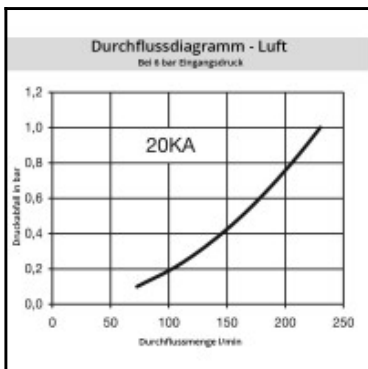


Datasheet of 20SFIN10MXX Plug with female thread

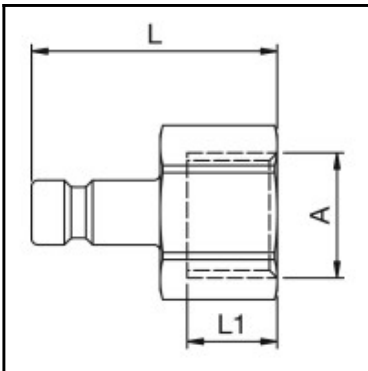

Description

Plug straight-through, female thread NPSF 1/8, nominal diameter 2,7, <35 bar, brass

Mini industrial coupling with internationally used profile. Frequent use in medical technology and chemistry/pharmacy. Coupling system with single-hand operation. High flow despite small dimensions plus many applications with a variety of media.

Details

| | |
|---|--|
| Series: | 20 |
| Series long: | 20SF |
| Bore in mm: | 2,7 |
| Bore area in mm²: | 6 |
| Advantages: | One-hand operation. Small dimensions. |
| Compatibility: | RECTUS 91 |
| Working pressure: | 35 bar maximum static working pressure with safety factor 4 to 1. |
| Working temperature: | -20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium. |
| Shut-Off: | Plug Straight-Through |
| Connection: | Female thread NPSF 1/8" |
| Connection description: | Female thread NPSF-thread ANSI B 1.20.3 1/8" |
| Connection type: | Female thread |
| Material: | Brass |
| Material description: | Brass CuZn39Pb3 2.0401 (except sleeve) |
| Surface: | blank finish |
| Weight in kg: | 0,0088 |
| Self-venting coupling: | No |
| Safety locking system: | No |
| Single-hand operation: | Yes |
| Two-hand operation: | No |
| Ball locking: | No |
| Pin lock: | No |
| Ultra-FLO-valve: | No |
| Vacuum suitable: | Yes |
| Water-resistant: | Yes |
| Flat-sealing: | No |
| Suitable breath / respiratory protection: | No |
| Pressure eliminator: | No |
| Hydraulics: | No |
| Pneumatics: | Yes |
| Standard product: | No |
| Mould coupling: | No |

Dimensions