
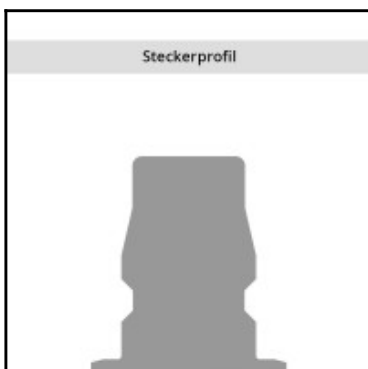
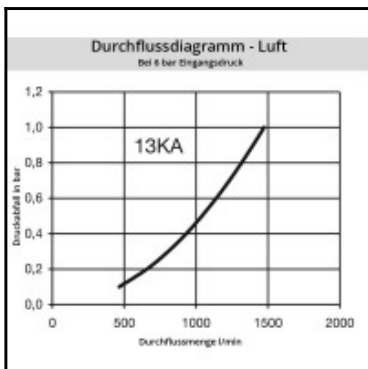


## Datasheet of 13SFAK13SXN Plug with male thread

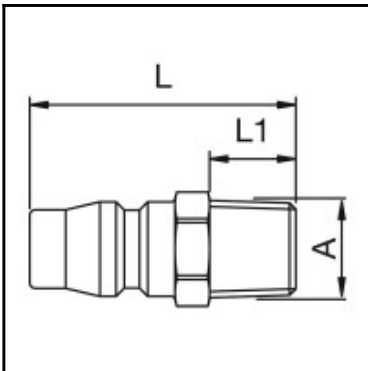

### Description

Plug straight-through, male thread R 1/4, nominal diameter 7,5, <35 bar, steel nickel plated

Robust brass coupling with Japanese industrial profile. Coupling system with single-hand operation. Above average flow volumes and structure resistant to the effects of external forces.

### Details

Series:	13
Series long:	13SF
Bore in mm:	7,5
Bore area in mm²:	45
Advantages:	One-hand operation. Corrosion free.
Compatibility:	RECTUS 03
Working pressure:	35 bar maximum static working pressure with safety factor 4 to 1.
Working temperature:	-20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium.
Shut-Off:	Plug Straight-Through
Connection:	Male thread 1/4"
Connection description:	Male tapered thread of Whitworth form DIN 2999 1/4"
Connection type:	Male thread
Material:	Steel nickel-plated
Material description:	Steel 9SMnPb28K 1.0718
Surface:	nickel plated
Weight in kg:	0,0223
Self-venting coupling:	No
Safety locking system:	No
Single-hand operation:	Yes
Two-hand operation:	No
Ball locking:	No
Pin lock:	No
Ultra-FLO-valve:	No
Vacuum suitable:	Yes
Water-resistant:	No
Flat-sealing:	No
Suitable breath / respiratory protection:	No
Pressure eliminator:	No
Hydraulics:	No
Pneumatics:	Yes
Standard product:	No
Mould coupling:	No

### Dimensions

Connection A:	R 1/4
L mm:	37
L1 mm:	12
SW mm:	14