
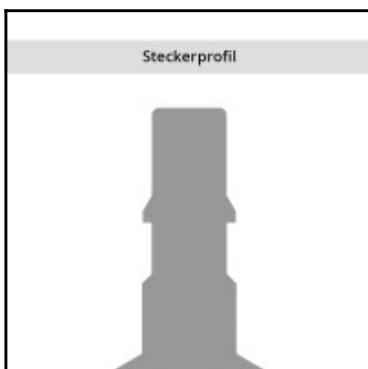
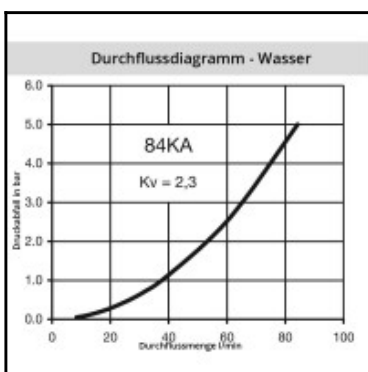
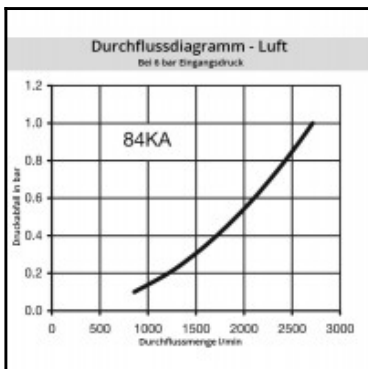


Datasheet of 84SFIW13SXN Plug with female thread

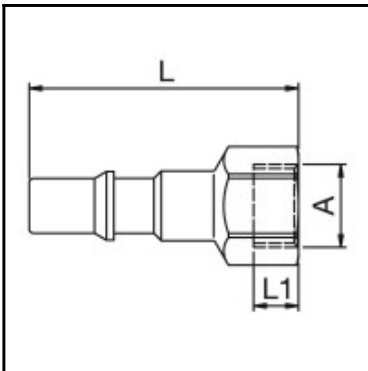

Description

Plug straight-through, female thread G 1/4, nominal diameter 8, <35 bar, steel nickel plated

Coupling system with single-hand operation. UltraFlo valve for optimum flow and low pressure drop. The high insertion depth is guaranteed by an optimised plug guide. Optimised locking of the plug due to 6-way ball valve.

Details

Series:	84
Series long:	84SF
Bore in mm:	8
Bore area in mm²:	50
Advantages:	One-hand operation. optimised locking of the plug. low pressure drop. UltraFlo valve.
Compatibility:	ISO 6150 C
Working pressure:	35 bar maximum static working pressure with safety factor 4 to 1.
Working temperature:	-20°C up to +100°C (NBR) other sealing materials available on request.
Shut-Off:	Plug Straight-Through
Connection:	Female thread 1/4"
Connection description:	Female pipe thread of Whitworth form ISO 228 1/4"
Connection type:	Female thread
Material:	Steel nickel-plated
Material description:	Steel 9SMnPb28K 1.0718
Surface:	nickel plated
Weight in kg:	0,035
Self-venting coupling:	No
Safety locking system:	No
Single-hand operation:	Yes
Two-hand operation:	No
Ball locking:	No
Pin lock:	No
Ultra-FLO-valve:	No
Vacuum suitable:	Yes
Water-resistant:	No
Flat-sealing:	No
Suitable breath / respiratory protection:	No
Pressure eliminator:	No
Hydraulics:	No
Pneumatics:	Yes
Standard product:	No
Mould coupling:	No

Dimensions

Connection A:	G 1/4
L mm:	53
L1 mm:	9
SW mm:	17