
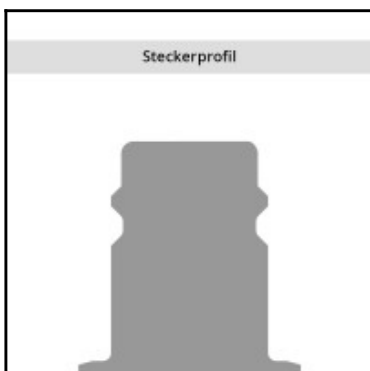
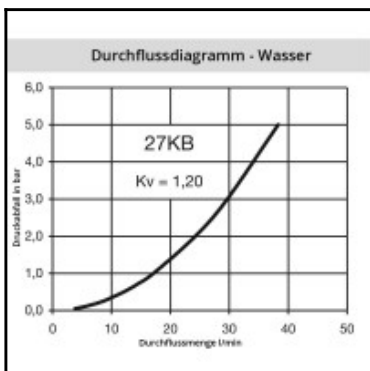
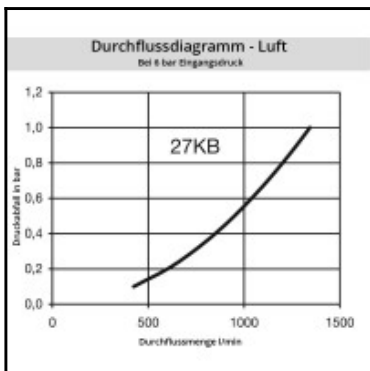


## Datasheet of 27SBTF06MPN Plug with hose barb

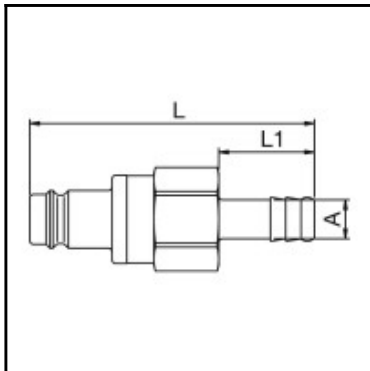

### Description

Plug double shut-off, hose barb 6mm (1/4), nominal diameter 10, <35 bar, brass nickel plated, seal NBR

1/2 universal industrial coupling with standard European profile for use with large pneumatic consumers. Coupling system with single-hand operation. UltraFlo valve for optimum flow and low pressure drop. The series stands out for its robust design (steel sleeve), extremely high flow and long service life even with the harshest use. The collar design minimises damage to the valve body.

### Details

|   |  |
|---|--|
| Series:                                   | 27   |
| Series long:                              | 27SB   |
| Bore in mm:                               | 10   |
| Bore area in mm²:                         | 80   |
| Advantages:                               | One-hand operation. Low pressure Drop. UltraFlo valve. The collar design minimises damage to the valve body.                     |
| Working pressure:                         | 35 bar maximum static working pressure with safety factor 4 to 1.  |
| Working temperature:                      | -20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) 0°C up to +316°C (FFKM) depending on the medium. |
| Shut-Off:                                 | Plug Double Shut-Off   |
| Connection:                               | Hose barb 6mm LW(1/4")   |
| Connection description:                   | Hose barb 6mm LW(1/4")   |
| Connection type:                          | Hose barb  |
| Material:                                 | Brass nickel plated  |
| Material description:                     | Brass CuZn39Pb3 2.0401 (except sleeve)   |
| Seal description:                         | Nitrite-butadiene rubber   |
| Surface:                                  | nickel plated  |
| Material connection:                      | Brass nickel plated  |
| Material valve:                           | Brass  |
| Material spring snap ring:                | stainless steel AISI 301   |
| Material seal:                            | Perbunan®  |
| Weight in kg:                             | 0,0962   |
| Self-venting coupling:                    | No   |
| Safety locking system:                    | No   |
| Single-hand operation:                    | Yes  |
| Two-hand operation:                       | No   |
| Ball locking:                             | No   |
| Pin lock:                                 | No   |
| Ultra-FLO-valve:                          | No   |
| Vacuum suitable:                          | No   |
| Water-resistant:                          | Yes  |
| Flat-sealing:                             | No   |
| Suitable breath / respiratory protection: | No   |
| Pressure eliminator:                      | No   |
| Hydraulics:                               | No   |
| Pneumatics:                               | Yes  |
| Standard product:                         | No   |
| Mould coupling:                           | No   |

### Dimensions

|               |      |
|---------------|------|
| Connection A: | 6 mm |
| L mm:         | 74   |
| L1 mm:        | 25   |
| SW mm:        | 24   |