
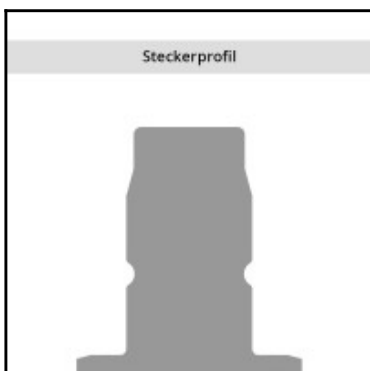
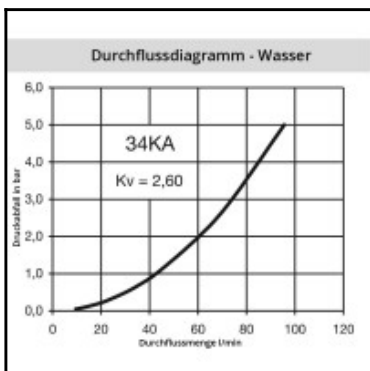
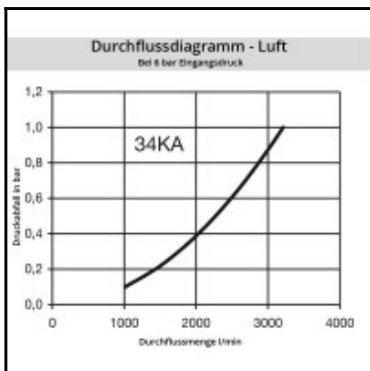


## Datasheet of 34SFTF06SXN Plug with hose barb

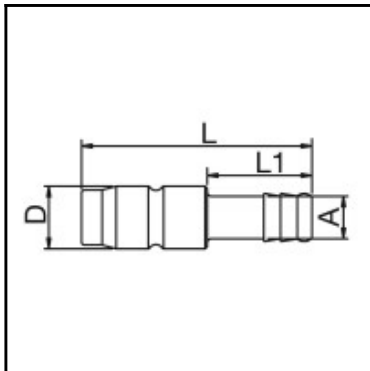

### Description

Plug straight-through, hose barb 6mm (1/4), nominal diameter 10, <35 bar, steel nickel plated

Industrial coupling with Atlas Copco-Profile. Coupling system with single-hand operation. UltraFlo valve for optimum flow and low pressure drop. Optimal for use with large pneumatic consumers due to the robust design and steel sleeve. The collar design minimises damage to the valve body.

### Details

|   |  |
|---|--|
| Series:                                   | 34   |
| Series long:                              | 34SF   |
| Bore in mm:                               | 10   |
| Bore area in mm²:                         | 80   |
| Advantages:                               | One-hand operation. Low pressure Drop. The collar design minimises damage to the valve body.             |
| Working pressure:                         | 35 bar maximum static working pressure with safety factor 4 to 1.  |
| Working temperature:                      | -20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium. |
| Shut-Off:                                 | Plug Straight-Through  |
| Connection:                               | Hose barb 6mm LW(1/4")   |
| Connection description:                   | Hose barb 6mm LW(1/4")   |
| Connection type:                          | Hose barb  |
| Material:                                 | Steel nickel-plated  |
| Material description:                     | Steel 9SMnPb28K 1.0718   |
| Surface:                                  | nickel plated  |
| Weight in kg:                             | 0,0239   |
| Self-venting coupling:                    | No   |
| Safety locking system:                    | No   |
| Single-hand operation:                    | Yes  |
| Two-hand operation:                       | No   |
| Ball locking:                             | No   |
| Pin lock:                                 | No   |
| Ultra-FLO-valve:                          | No   |
| Vacuum suitable:                          | Yes  |
| Water-resistant:                          | No   |
| Flat-sealing:                             | No   |
| Suitable breath / respiratory protection: | No   |
| Pressure eliminator:                      | No   |
| Hydraulics:                               | No   |
| Pneumatics:                               | Yes  |
| Standard product:                         | No   |
| Mould coupling:                           | No   |

### Dimensions

|               |      |
|---------------|------|
| Connection A: | 6 mm |
| D mm:         | 15   |
| L mm:         | 55   |
| L1 mm:        | 25   |