
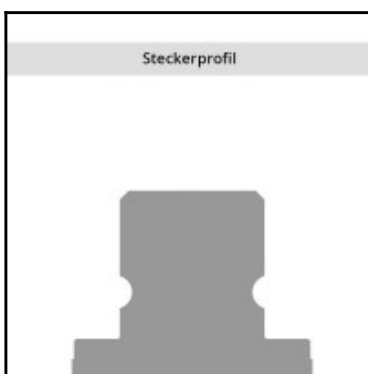
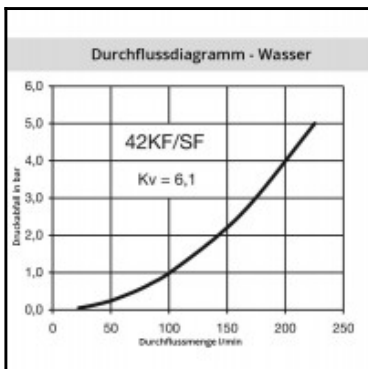


Datasheet of 42SFAW26MXC Plug with male thread

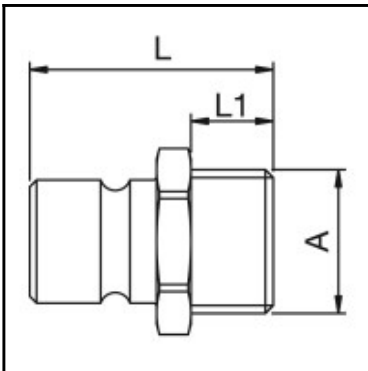

Description

Plug straight-through, male thread G 3/4, nominal diameter 11, <35 bar, brass chrome plated

Brass coupling with no valve for applications with liquids in the pressure range up to 35 bar. The couplings are corrosion resistant. The system stands out for a high flow with minimal pressure drop.

Details

| | |
|---|--|
| Series: | 42 |
| Series long: | 42SF |
| Bore in mm: | 11 |
| Bore area in mm²: | 95 |
| Advantages: | Non-corrosive. High flow. Minimal pressure drop. |
| Working pressure: | 35 bar maximum static working pressure with safety factor 4 to 1. |
| Working temperature: | -20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium. |
| Shut-Off: | Plug Straight-Through |
| Connection: | Male thread 3/4" |
| Connection description: | Male pipe thread of Whitworth form ISO 228 3/4" |
| Connection type: | Male thread |
| Material: | brass chrome plated |
| Material description: | Brass CuZn39Pb3 2.0401 (except sleeve) |
| Surface: | chrome plated |
| Weight in kg: | 0,118 |
| Self-venting coupling: | No |
| Safety locking system: | No |
| Single-hand operation: | Yes |
| Two-hand operation: | No |
| Ball locking: | No |
| Pin lock: | No |
| Ultra-FLO-valve: | No |
| Vacuum suitable: | Yes |
| Water-resistant: | Yes |
| Flat-sealing: | No |
| Suitable breath / respiratory protection: | No |
| Pressure eliminator: | No |
| Hydraulics: | No |
| Pneumatics: | Yes |
| Standard product: | No |
| Mould coupling: | No |

Dimensions

| | |
|---------------|-------|
| Connection A: | G 3/4 |
| L mm: | 42,5 |
| L1 mm: | 16 |
| SW mm: | 32 |