
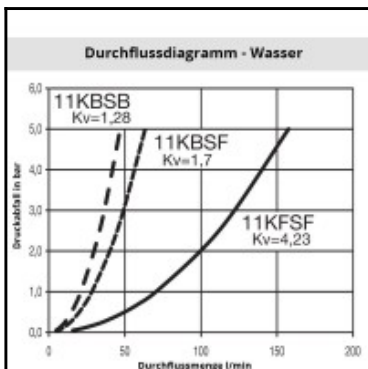


## Datasheet of 11SBAM16MVX Plug with male thread

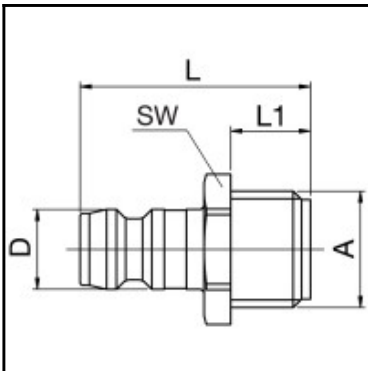

### Description

Plug double shut-off, male thread M 16 x 1,5, nominal diameter 9, <15 bar, brass, seal FKM

The 10, 11 and 12 Rectus Moldtite coupling series were especially developed for connecting coolant lines and injection moulds. These stand out for their convenient, singlehanded operation and a reliable O-ring seal. Widely used in Europe.

### Details

|   |  |
|---|--|
| Series:                                   | 11   |
| Series long:                              | 11SB   |
| Bore in mm:                               | 9  |
| Bore area in mm²:                         | 63   |
| Advantages:                               | Available in single shut-off, double shut-off or straightthrough versions also available with SAFE-LOCK™-technology. The straight-through couplings are equipped with nickel plated sleeves for quick and accurate visual differentiation. The angular connections prevent kinks from forming in the hose. |
| Working pressure:                         | PB = 15 bar maximum static working pressure with safety factor 4 to 1.   |
| Working temperature:                      | -15°C up to +200°C (FKM) depending on the medium   |
| Shut-Off:                                 | Plug Double Shut-Off   |
| Connection:                               | Male thread M 16 x 1,5   |
| Connection description:                   | Male thread M 16 x 1,5   |
| Connection type:                          | Male thread  |
| Material:                                 | Brass  |
| Material description:                     | Brass CuZn39Pb3 2.0401 (except sleeve)   |
| Seal description:                         | Fluororubber   |
| Surface:                                  | blank finish   |
| Material valve:                           | Brass  |
| Material spring snap ring:                | stainless steel AISI 301   |
| Material seal:                            | Viton®   |
| Weight in kg:                             | 0,0216   |
| Self-venting coupling:                    | No   |
| Safety locking system:                    | No   |
| Single-hand operation:                    | Yes  |
| Two-hand operation:                       | No   |
| Ball locking:                             | No   |
| Pin lock:                                 | No   |
| Ultra-FLO-valve:                          | No   |
| Vacuum suitable:                          | Yes  |
| Water-resistant:                          | Yes  |
| Flat-sealing:                             | No   |
| Suitable breath / respiratory protection: | No   |
| Pressure eliminator:                      | No   |
| Hydraulics:                               | No   |
| Pneumatics:                               | No   |
| Standard product:                         | No   |
| Mould coupling:                           | Yes  |

### Dimensions

|               |          |
|---------------|----------|
| Connection A: | 16 x 1,5 |
| D mm:         | 13,5     |
| L mm:         | 30       |
| L1 mm:        | 12       |
| SW mm:        | 17       |