
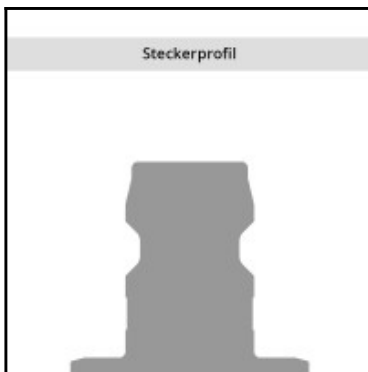
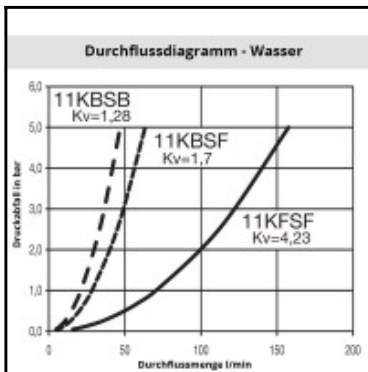
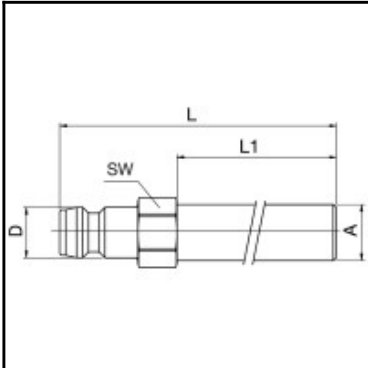


Datasheet of 11VNXX45MXX Extension nipple

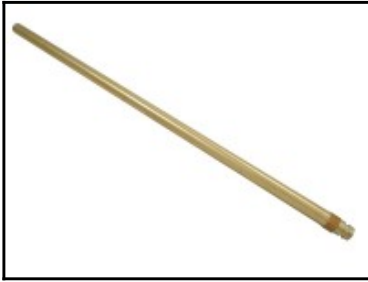

Description

Extension nipple straight-through, without thread 14 mm, nominal diameter 9, <15 bar, brass

The 10, 11 and 12 Rectus Moldtite coupling series were especially developed for connecting coolant lines and injection moulds. These stand out for their convenient, singlehanded operation and a reliable O-ring seal. Widely used in Europe.

Details

| | |
|---|--|
| Series: | 11 |
| Series long: | 11VN |
| Bore in mm: | 9 |
| Bore area in mm²: | 63 |
| Advantages: | Available in single shut-off, double shut-off or straightthrough versions also available with SAFE-LOCK™-technology. The straight-through couplings are equipped with nickel plated sleeves for quick and accurate visual differentiation. The angular connections prevent kinks from forming in the hose. |
| Working pressure: | PB = 15 bar maximum static working pressure with safety factor 4 to 1. |
| Working temperature: | -15°C up to +200°C (FKM) depending on the medium |
| Shut-Off: | Plug Straight-Through |
| Connection: | without thread 14 mm |
| Connection description: | Pipe without thread outer diameter 14 mm |
| Connection type: | without thread |
| Material: | Brass |
| Material description: | Brass CuZn39Pb3 2.0401 (except sleeve) |
| Surface: | blank finish |
| Weight in kg: | 0,341 |
| Self-venting coupling: | No |
| Safety locking system: | No |
| Single-hand operation: | Yes |
| Two-hand operation: | No |
| Ball locking: | No |
| Pin lock: | No |
| Ultra-FLO-valve: | No |
| Vacuum suitable: | Yes |
| Water-resistant: | Yes |
| Flat-sealing: | No |
| Suitable breath / respiratory protection: | No |
| Pressure eliminator: | No |
| Hydraulics: | No |
| Pneumatics: | No |
| Standard product: | No |
| Mould coupling: | Yes |

Dimensions

| | |
|---------------|-------|
| Connection A: | 14 mm |
| D mm: | 13,5 |
| L mm: | 450 |
| L1 mm: | 425 |
| SW mm: | 15 |