
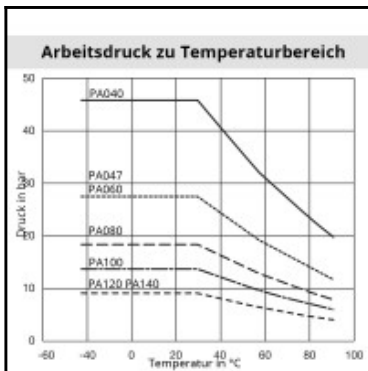


Datasheet of PA060/025/03 PA-hose

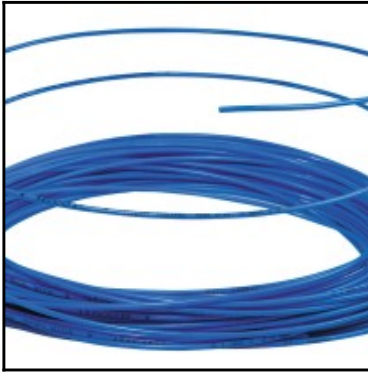

Description

PA-hose blue, RECTULASTIC, 4,0 x 6,0 mm, length 25 m

RECTULASTIC hoses from Nycoil for safer, more efficient air power transmission.

Details

| | |
|------------------------|--|
| Series: | RECTULASTIC |
| Colour: | blue |
| Material: | Nylon 12 (PA) |
| Working temperature: | -40°C up to +90°C |
| Working pressure: | see chart |
| Outside calibrated: | Yes |
| Advantages: | - quick assembly possible - straight hoses ideal for Push-In-System - light weight - low pressure drop - different colors for identification - good storage possibility due to box packing (straight hoses) - high abrasion resistance - self-retracting. Coiled Hose automatically recoils to a fraction of its working length - small bending diameter - resistant to oil, gasoline, grease and abrasion |
| Physical properties: | - light weight (specific weight 9x lower as copper) _x000D_ - wide temperature range _x000D_ - high resistance against moisture _x000D_ - saltwater insensitive _x000D_ - long service time |
| Mechanical properties: | - high vibration prevention _x000D_ - perfect abrasion resistance _x000D_ - high compression characteristics _x000D_ - low flow reduction for all kind of media _x000D_ - precise tolerances _x000D_ - constant solidity |
| Medium suitability: | - compressed air - lubrication grease/oil - gasoline - hydraulic - vacuum - chemicals (on request) - foodstuff (on request) |
| Weight in kg: | 0,4293 |

Dimensions

| | |
|----------------------------|---------|
| Inner diameter: | 4,0 mm |
| Connection 1: | without |
| Connection 2: | without |
| Length in m: | 25 |
| Hose Inner diameter in mm: | 4,0 |
| Outer diameter in mm: | 6,0 |
| Wall thickness in mm: | 1 |