


Datasheet of 500-31 Swivel joint

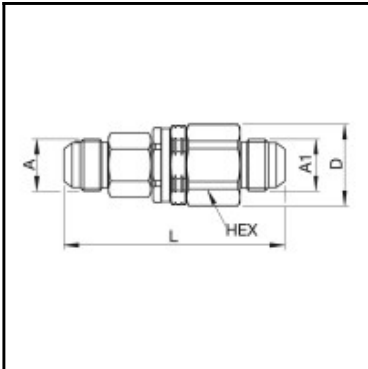

Description

Swivel joint male thread 7/8-14 UNF auf 7/8-14 UNF, max. 250 bar

Can be used in hydraulic systems where rotating connections are essential, for example on accessories with rotating movements. Depending on design, the body is made of brass (DG) or steel (KR) and the rotating axis of surfacepurified/stainless steel. Maximum rotation speed: 60 r.p.m.

Details

Series:	DG
Series long:	DG
Maximum working pressure in bar:	250
Advantages:	Rotating joints minimise the high wear to the hose, which occurs in hydraulic systems. Solid construction with two plain bearings (DG) or ball/ roller bearings (KR). Suitable for combining with norm hydraulic components.
Working temperature:	-40°C up to +90°C (NBR) depending on the medium.
Connection type:	Male thread
Material body:	Brass
Material axis of rotation:	Steel nitrided
Material nut/adapter:	Steel, zinc-plated, passivated, sealed
Weight in kg:	0,307
Hydraulics:	Yes

Dimensions

Connection A:	7/8"-14 UNF
Connection A1:	7/8"-14 UNF
D mm:	35
L mm:	92
SW mm:	32