
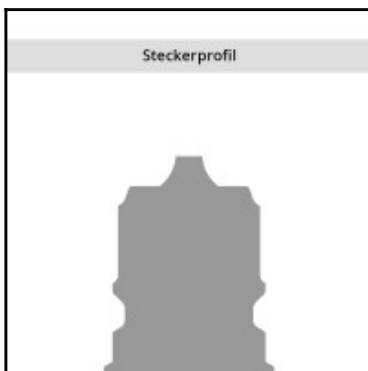


## Datasheet of 2320 Hydraulic plug

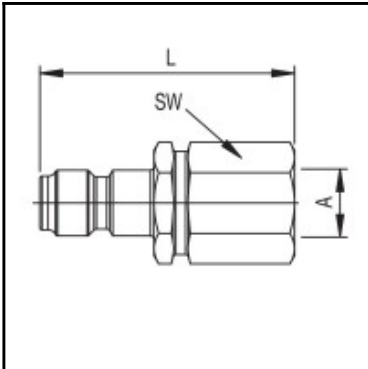

### Description

Hydraulic plug double shut-off, female thread G 1/8, nominal diameter 5, 200 bar, steel, seal NBR

The TEMA Standard Series is characterised by a low pressure drop and maximum flow capacity. The coupling system is available as double shut-off or straight through version. The 2500 can be used also as a single shut-off version.

### Details

Series:	T
Series long:	2300
Bore in mm:	5
Bore area in mm²:	20
Size in general:	1/8"
Advantages:	Hoher Durchfluss – minimaler Druckabfall. Hoher Betriebsdruck. Korrosionsbeständig. Kleine Dimensionen.
Coupled working pressure in bar:	200
Working temperature:	-30°C up to +100°C (NBR) -25°C up to +200°C (FKM) depending on the medium.
Shut-Off:	Plug Double Shut-Off
Connection:	Female thread 1/8"
Connection type:	Female thread
Material:	Steel
Surface:	zinc plated, passivated, sealed
Material valve body:	steel hardened
Material valve:	Brass
Material valve holder:	Zinc cast
Material spring snap ring:	1.4310
Weight in kg:	0,0246
Safety locking system:	No
Single-hand operation:	Yes
Two-hand operation:	No
Ball locking:	Yes
Vacuum suitable:	No
Flat-sealing:	No
Pressure eliminator:	No
Hydraulics:	Yes

### Dimensions

Connection A:	G 1/8"
D mm:	17
L mm:	36
SW mm:	15