


Datasheet of Spring balancer 77001413

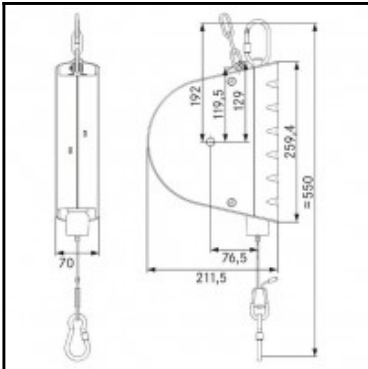

Description

Spring balancer, payload range 7 - 10 kg, cable length 3 m, infinitely variable load setting, automatic locking

Spring balancers for continuous operation with smooth withdrawal. The 3,0 meters cable length is well suitable for the rough requirements in daily use. The hanging is done through a freely turnable and traversable screwing carabiner. The casing is made of shockproof and abrasion-resistant plastic, red-orange. The blockable cable drum is made of abrasion-resistant plastic. Infinitely variable load setting through adjusting screw with over-twist protection. Load mounting with screwing carabiner. The cable stop buffer is shockproof and adjustable. The cable length is infinitely variable adjustable through a cable lock. High-strength and bandaged special mainspring. The automatic locking of the cable windup makes it possible to block the device. Longer cables available on demand.

Details

Series:	7222
Series long:	7222
Payload range in kg:	7 - 10
Cable length in m:	3
Material casing:	Shockproof special plastic
Additional information:	Do not use the locking for changing the load!
Suspension:	Freely turnable and traversable screwing carabiner
Load attachment:	Screwing carabiner
Load setting:	Through adjusting screw with over-twist protection
Cable stop:	Yes, shock absorbing and adjustable
Locking:	Yes
Spring fracture protection:	Yes
Fall protection:	Existing, according to DIN 15112
Weight in kg:	3,8

Dimensions