


Datasheet of Balancer 77000587

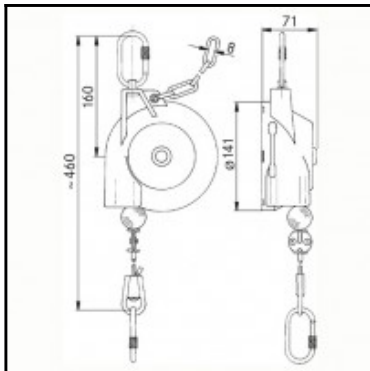

Description

Balancer, payload range of 1,2 to 2,6 kg, cable length 1,6 m, simplified load setting

Sensitive device for production and installation - can be integrated into machines. Hanging with a turnable screwing carabiner. The casing is made of extremely shockproof plastic, red-orange. High-strength steel cable with elastic cable stop buffer and carabiner for hanging the load. Infinitely variable load setting through adjusting screw. The cable length is infinitely variable adjustable through a cable lock and the working stroke can be infinitely variable shortened with a cable clamp. Riveted special mainspring simplifies the load setting. Longer cables available on demand.

Details

| | |
|-----------------------------|-------------------------------------|
| Series: | 7228 |
| Series long: | 7228 |
| Payload range in kg: | 1,2 - 2,6 |
| Cable length in m: | 1,6 |
| Material casing: | Shockproof special plastic |
| Suspension: | Turnable screwing carabiner |
| Load attachment: | Secure screwing carabiner |
| Load setting: | by screening |
| Cable stop: | Yes, shock absorbing and adjustable |
| Locking: | No |
| Spring fracture protection: | Yes |
| Fall protection: | Existing, according to DIN 15112 |
| Weight in kg: | 1,4 |

Dimensions