


## Datasheet of Balancer 77000870

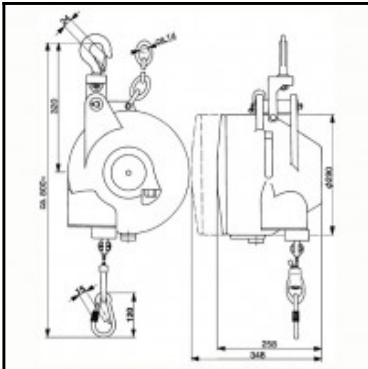

### Description

Balancer, payload range of 130 to 140 kg, cable length 3 m, working stroke infinitely variable adjustable

Absolute precision and safety due to high quality. High operating safety due to high quality. The hanging is positionable and done through a freely turnable and traversable safety hook. The casing, the casing lid and the cable drum are made of high-strength aluminium sand casting. High-strength steel cable with elastic cable stop buffer and carabiner for hanging the load. The cable length is infinitely variable adjustable through a cable lock – with cable length limit. Infinitely variable load setting through adjusting screw. Full encapsulated special mainspring. The double ball bearing mounted cable drum is blockable with an integrated locking. Patented over-twist protection of the suspension spring. Longer cables available on demand.

### Details

|                             |   |
|-----------------------------|---|
| Series:                     | 7251  |
| Series long:                | 7251  |
| Payload range in kg:        | 130 - 140                                   |
| Cable length in m:          | 3   |
| Material casing:            | Aluminium sand casting                      |
| Additional information:     | With 2 springs                              |
| Suspension:                 | Freely turnable and traversable safety hook |
| Load attachment:            | Screwing carabiner                          |
| Load setting:               | Through adjusting screw                     |
| Cable stop:                 | Yes, shock absorbing and adjustable         |
| Locking:                    | No  |
| Spring fracture protection: | Yes   |
| Fall protection:            | Existing, according to DIN 15112            |
| Weight in kg:               | 46  |

### Dimensions